



JUST ADD WATER



20 kg

ROOF TILE BEDDING MORTAR

MADE
Right Here

Designed to minimise 'slumping'

Retains moisture for improved workability in warm conditions

Conforms to the bedding mortar requirements specified in AS2050

One 20kg bag beds 3m of ridge or hip tiles

**CEMENT
AUSTRALIA**®



BEDDING RIDGE
& HIP TILES
plus general roofing
mortar repairs

ROOF TILE BEDDING MORTAR



- ✓ Conforms to Australian Standard - AS2050
- ✓ Ready to use product - just add water
- ✓ Quality premixed product specifically formulated for roof tile bedding applications
- ✓ Suitable for all aspects of bedding ridges, barges and apexes
- ✓ Designed to ensure that tiles 'sit up' on the bedding mix and reduces slumping
- ✓ Excellent workability

Build with Confidence

cementaustralia.com.au or call 1300 CEMENT (1300 236 368)

MADE
Right Here

**CEMENT
AUSTRALIA**®

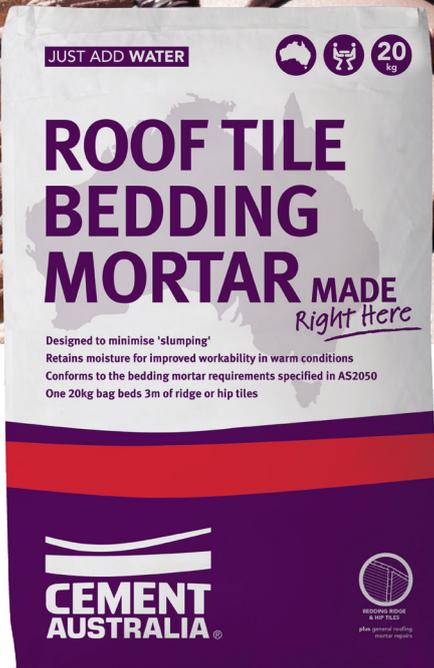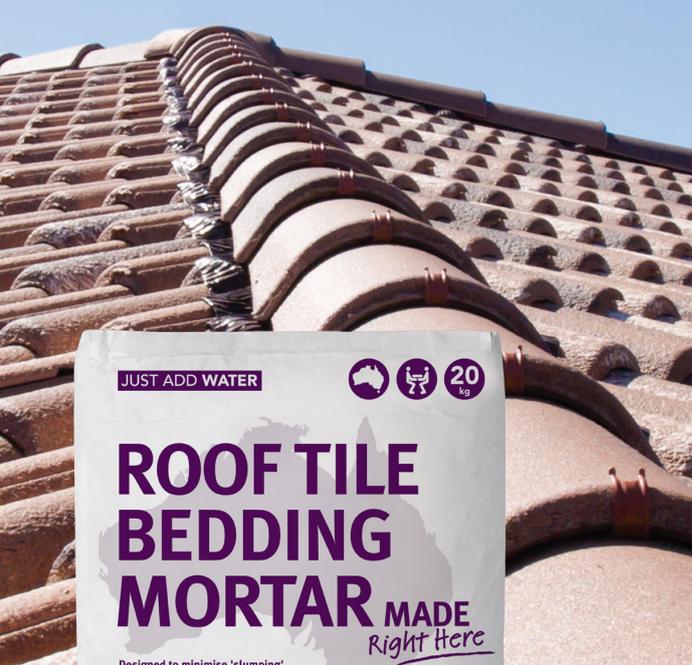

Cement Australia's Roof Tile Bedding Mortar consists of cement, dried sand and additives and is suitable for all aspects of bedding clay and concrete ridges, barges and apexes.

Conforms to the bedding mortar requirements specified in AS2050.

Performance of the bedding mortar is imperative as ridge and hip tiles are located at the most vulnerable positions on pitched roofs and this product prevents tile movement which in turn prevents moisture penetration.

Roof Tile Bedding Mortar is designed to retain moisture to assist the natural hydration process especially at warm to hot temperatures.

HOW TO USE



STEP 1 Place the required amount of Roof Tile Bedding Mortar into a mixer or onto a non-absorbent surface.



STEP 2 Gradually add clean water per instructions on the bag, ensuring it does not wash away any of the cement. Mix the mortar thoroughly to ensure a consistent mix.



STEP 3 Form a mortar bed of approximately 50mm in width on both sides and ends of the ridge or hip tile. Bed the tile in position and remove any mortar that may have been squeezed out when placing the tile.



STEP 4 Use a trowel and sponge to neaten the bedding mortar to provide a clean face for the pointing mix to be applied later.

SPECIFICATIONS

One 20kg bag beds 3m of ridge or hip tiles.

HINTS & TIPS

- Do not mix more material than can be applied in one (1) hour.
- Once three or four ridge or hip tiles have been laid, level the tiles and tap them down to achieve compaction to complete the mortar bond.

LIMITATIONS

The addition of plasticisers and products that aerate the Roof Tile Bedding Mortar should be avoided as these products weaken the mortar.

To view all product limitations, storage & handling tips please visit cementaustralia.com.au

Item Code 17341

Cement Australia
Roof Tile Bedding
Mortar 20kg



PRODUCT DISCLAIMER

Recommendations regarding the use of this product are to be taken as a guide only. If in doubt contact Cement Australia Pty Limited ("Cement Australia") or seek professional advice. To the extent permitted by law, Cement Australia excludes all implied warranties, conditions and guarantees imposed by legislation. Cement Australia excludes all liability for loss, damage or injury arising from use of the product (i) otherwise than in accordance with the recommendations or (ii) for purposes other than those for which it is ordinarily acquired. For all other loss, damage or injury arising from the use of this product, to the extent permitted by law Cement Australia's liability is limited, at its discretion, to refunding the cost of the product or resupplying the product or equivalent product.

Safety Data Sheet available at cementaustralia.com.au

MADE
Right Here

CEMENT
AUSTRALIA®